


## 100C4 Froet Drain® roof drain Submittal

The Froet Drain® bi-functional roof drain is to be used in any flat roof construction. All drain parts are cast iron with the exclusion of the overflow riser pipe which is steel. Connections are all no hub.

### Installation Tips:

The extensions are to be used to provide clearance of the primary outlet when used with thicker decks and/or thicker insulations. Froet Industries recommends that a sump be created with the insulation to promote flow and prevent ponding due to the height of the drain ring. Any ponding at the roof drain is likely to increase the frequency of the drain strainer becoming obstructed with debris. The roofing contractor needs to install roofing membrane so as to not obstruct the primary sump area

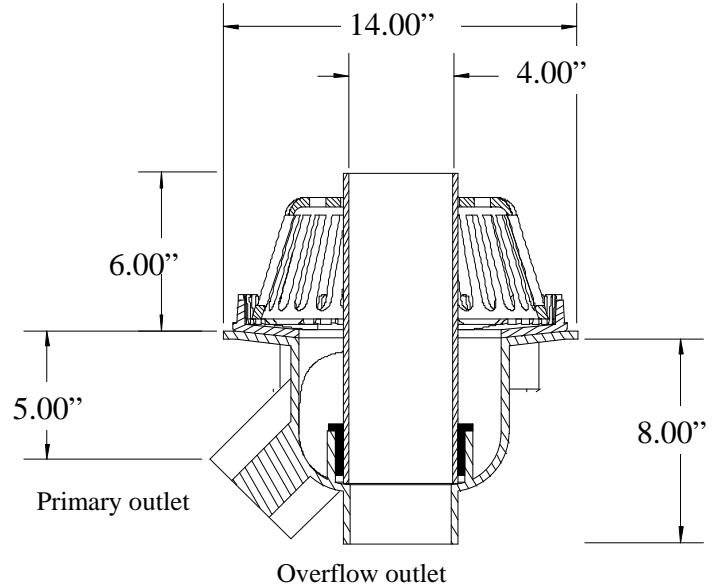

### Project Options

<b>LP</b>	Low Profile
<b>DC</b>	Deck Clamp
<b>DEX-2</b>	2" Extension
<b>DEX-4</b>	4" Extension
<b>DEX-6</b>	6" Extension
<b>OFS</b>	Overflow Strainer
<b>DP</b>	Flat Drain Pan
<b>SP</b>	Sumped Drain Pan
<b>DMP</b>	Deck Mounting Plate
<b>FR</b>	Finishing Ring
<b>IG</b>	IRMA Roof Guard
<b>CFW</b>	Control Flow Weir
<b>VP</b>	Vent Pipe

**Standard** roof drain supplied with 5 inch high primary strainer and 6 inch high overflow.

**Low Profile** roof drain supplied with 3 inch high primary strainer and 4 inch high overflow.

**Please note:** Overflow strainer not included with base drain. The OFS designation must be in part number to include overflow strainer

Project name: \_\_\_\_\_

Contractor: \_\_\_\_\_

Gen Cont: \_\_\_\_\_

Design Firm: \_\_\_\_\_

**Froet Industries LLC** 1741 Industrial Drive  
Sterling Illinois 61081  
ph. 815.626.7922 fax. 815.626.0702  
www.froetindustries.com